




INSTRUCTION MANUAL

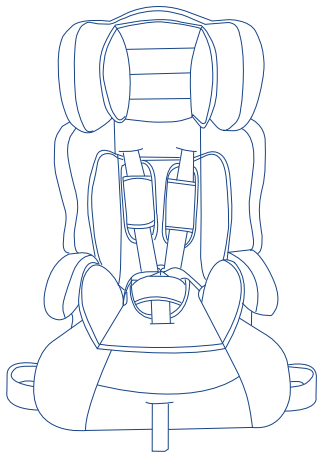

EST-215
Group 1/2/3
9kg to 36kg
(Approximately 1 year - 11 years)

ECE R 16 No 44.04

Cozy 'N' Safe Everest Group 1, 2, 3 Car Seat
(9kg to 36kg /approx. 1 Year to 11 Years)

Thank you for purchasing this Group 1, 2, 3 car seat. If you are not completely satisfied with the car seat or you would like to change any accessory or obtain any help about the car seat, you can contact our customer services department.

Storage of the User Guide

It is most important that these instructions remain with the car seat at all times.

The instruction manual can be stored in the allocated space on the side of the backrest.

Please read this instruction manual carefully before use.

NOTICE

1. This is a “Universal” child restraint, it is approved to Regulation No 44, 04 series of amendments, for general use in vehicles and it will fit most, but not all car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a “Universal” child restraint for this age group.
3. This child restraint has been classified as “Universal” under more stringent conditions than those which applied to earlier designs which do not carry this notice
4. If in doubt, consult either the child restraint manufacturer or the retailer.

SAFETY WARNINGS

EST-215 Car Seat

Do not install or use this child restraint until you carefully read the installation instructions provided by the child restraint manufacturer.

This child restraint is for forward facing use only.

Do not secure your child restraint in the front passenger vehicle seating position equipped with an airbag.

Please pay attention to all the red markings / stickers or red plastic parts on the seat, which are the belt routes for installation.

EST-215 Car Seat

Any straps holding the restraint to the vehicle should be tight, any straps restraining the child restraint should be adjusted to the child's body, and straps should not be twisted.

Children cannot be left in the child restraint system unattended.

Ensure that any lap strap is worn low down, so that the pelvis is firmly engaged.

EST-215 Car Seat

The child restraint system should be changed when it has been involved in any accident, there could be hidden damages.

Do not make any alterations or additions to the device without the approval of the competent authority.

Any luggage or other subjects should be properly secured or stored as they may cause injuries in the event of a collision or sudden braking.

The child restraint must not be used without the cover.

EST-215 Car Seat

The seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the child restraint system performance.

The instructions must be kept with the seat for its life period.

Do not use any load bearing contact points other than those described in the instruction and marked on the child restraint.

EST-215 Car Seat

The rigid items and plastic parts of a child restraint must be located following this instruction and installed so that they are not liable, during everyday use of the vehicle to become trapped by a movable seat or in a door of the vehicle.



EST-215 Car Seat

Customer Information

WARNING! ALWAYS GIVE PREFERENCE TO USING THE REAR SEATS OF YOUR VEHICLE EVEN IF YOUR HIGHWAY CODE PERMITS THE USE ON THE FRONT SEAT. CHECK YOUR HIGHWAY CODE AS THIS REGULATION MAY VARY ACCORDING TO THE COUNTRY. CHECK THE VEHICLE MANUAL FOR ADVICE ON FITTING YOUR CAR SEAT IN THE FRONT OF THE VEHICLE. AIRBAGS CAN CAUSE INJURY. DO NOT USE THIS CHILD SEAT ON A PASSENGER SEAT FITTED WITH A FRONT AIRBAG.



EST-215 Car Seat

Customer Information

WARNING! AIRBAGS CAN CAUSE INJURY. DO NOT USE THIS CHILD SEAT ON A PASSENGER SEAT FITTED WITH A FRONTAL AIRBAG.

Customer Information

WARNING! TOXIC CLEANING FLUIDS CAN CAUSE ILLNESS. NEVER USE BLEACH, DO NOT IRON. DO NOT MACHINE WASH, DO NOT TUMBLE DRY AS THIS COULD DAMAGE THE COVER AND REQUIRE REPLACING.



APPLICABILITY

The child car seat is suitable for weight categories I to III (group I-II), which means children with a body weight between 9kg and 36kg

Mass Group I: 9-18kg

Mass Group II,III: 15-36kg


This child car seat can be used with it's harness system for children of weight group I. It must be secured with the belt fastener on the 3-point vehicle belt.

For children of weight categories II and III (15kg to 36kg) the harness system must be removed and the vehicle's 3-point belt system used to secure the child.

EST-215 Car Seat

Safety Instruction

Only suitable if the approved vehicles are fitted with 3 point safety-belts, approved to UN/ECE Regulation No.16 or other equivalent standards.

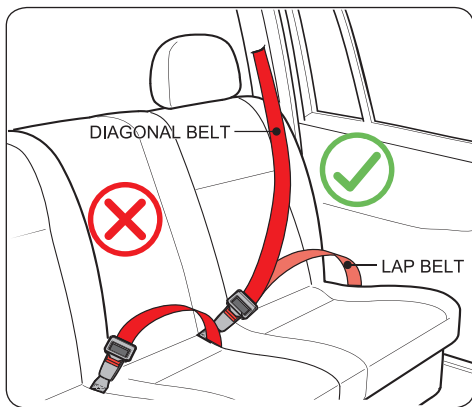


Using safety seat in this way

Forward facing traffic direction	Correct
Back facing traffic direction	Error
Vehicle is only fitted with 2 - point safety belt	Error
Vehicle is fitted with 3 - point safety belt	Correct
Seat beside the driver	Correct
Rear seat	Correct
Rear middle seats three-point belt	Correct

Please carefully implement the Country Traffic Safety Regulations.

- Do not install the child safety seat at the front seat with airbag.
- Please read the instruction manual carefully that how to use the airbag.

NOTICE

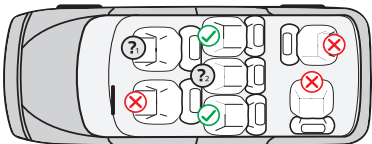


- ✔ Belt in this location
- ✘ Unable to install the position
- ① Do not install the child safety seat at the front seat with air bag.
- ② Only with the three point safety belt, can this location.

EST-215 Car Seat PARTS


- | | | | |
|---|------------------------|---|--------------------------|
| A | Head cushion | J | Belt guide |
| B | Insert pad | K | Cup holder |
| C | Chest pad | L | Base |
| D | Comfort pad | M | Height adjuster |
| E | Harness adjuster lever | N | Head belt guide group II |
| F | Harness adjuster strap | O | Belt slot |
| G | Headrest | P | Harness |
| H | Backrest | Q | Belt guide |
| I | Buckle | R | Harness connector |

EST-215 Car Seat

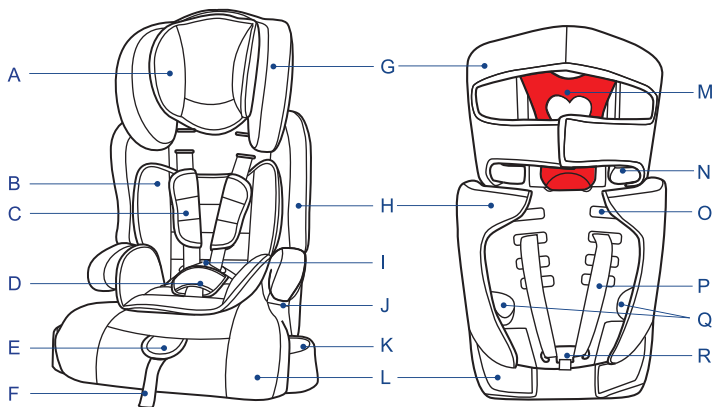

CUP HOLDERS EACH SIDE

To open the cup holder, pull firmly and it will slide out and click into place.



C | S
— COZY N SAFE —

EST-215 Car Seat

Assembly of the car seat

Forward facing group 1, 2, 3

(9kgs -36kgs / approx 1 year to 11 years)

Install the car seat in the car.

Attach the base of the car seat to the backrest. (1) Press the hook, (2) ensure that the hooks fit into the holes of the booster seats, then stand the car seat. (3) when you hear a click sound, this indicates that it has successfully locked in place.

Firstly, you will need to check the car seat is assembled correctly and ready for use (see Fig 1, 2, 3), then place the car seat onto the vehicle seat in the direction of the travel.

EST-215 Car Seat

Assembly of the car seat




Fig.1




Fig.2

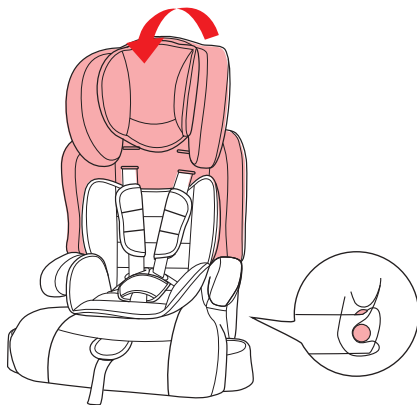



Fig.3

GROUP 1

EST-215 Car Seat

CORRECT SHOULDER STRAPS HEIGHT

Always check that the shoulder straps are at the correct height for your child. The child's shoulders should always be below the slot for the harness.

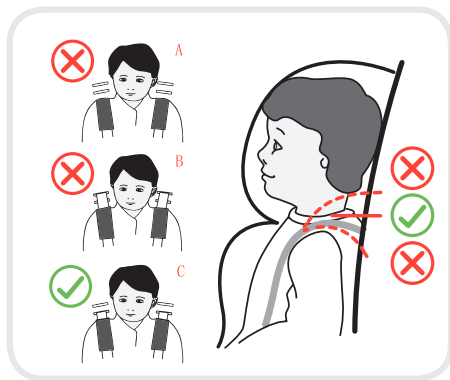

EST-215 Car Seat

CHANGING THE SHOULDER STRAP HEIGHT

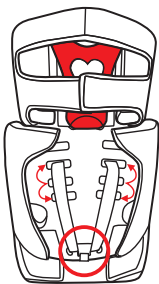


Fig.1




Fig.2





Fig.3

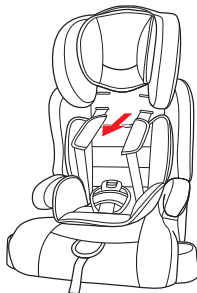

EST-215 Car Seat

CHANGING THE SHOULDER STRAP HEIGHT

Firstly release the strap holding the backrest cover on to gain access to the harness. Slide one of the harness straps off the harness connector.

Then from the front of the seat, pull the harness through the slot in the backrest and fabric cover. Thread the harness strap back through the next hole up or down on the seat backrest.

EST-215 Car Seat

CHANGING THE SHOULDER STRAP HEIGHT

Re-thread the harness strap back onto the harness connector at the back of the seat.

Repeat the same process for the other harness strap. Make sure both of the straps go through slots at the same height.

EST-215 Car Seat

GROUP

1

(9 - 18kgs)

Step 1. Place the child safety seat on the vehicles seat ensuring it is firmly pressed against the car seat backrest.

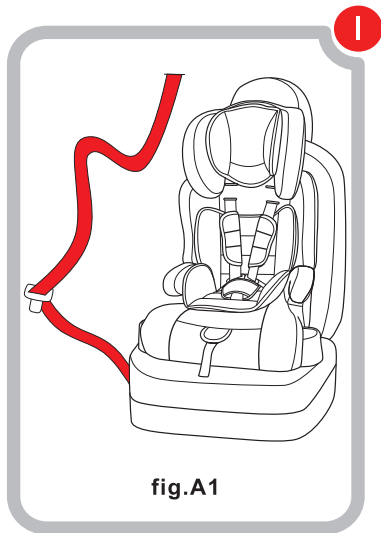


fig.A1

EST-215 Car Seat

GROUP

1

(9 - 18kgs)

Step 2. Thread the car seat belt in through the seat belt route slot in the seat's plastic backrest furthest from the car's seat belt buckle, and then out through the other seat route slot and fasten it into the seat belt buckle.



fig.A2


EST-215 Car Seat

GROUP

1

(9 - 18kgs)

Step 3. Check the harness of the seat belt has not become twisted or tangled and that the lap belt goes under the armrest and the diagonal on the side of the backrest.

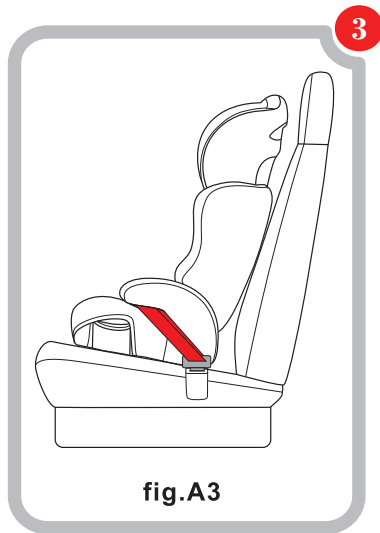

C | S
— COZY N SAFE —


EST-215 Car Seat

GROUP

1

(9 - 18kgs)

Step 4. Place your knee on the base of the safety seat and grip the top piece of the seat harness. pull the harness upwards to tighten the seat belt.

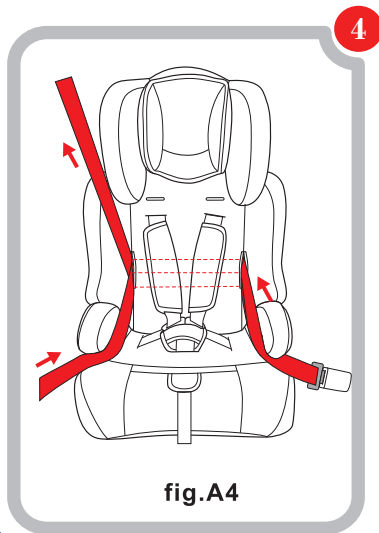

EST-215 Car Seat

GROUP

1

(9 - 18kgs)

Step 5. Finish tightening the harness by pulling the diagonal strap upwards until there is no slack and the seat is held firmly in place. Now you can strap your child into the seat. Make sure the seat belt has not become twisted. Also check that the cover is in not impeding the movement or fit of the seat harness in any way. To release your child seat follow the above instructions in reverse order.

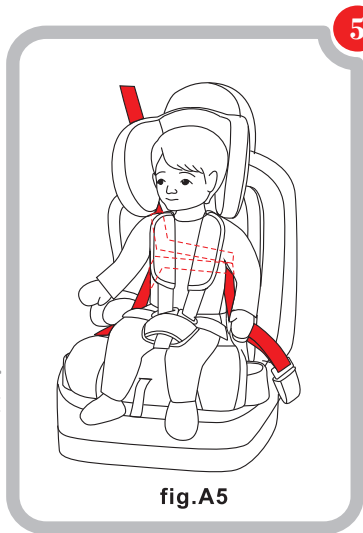



fig.A5

EST-215 Car Seat

TIGHTENING THE HARNESS

Pull the shoulder straps upwards to remove the slack from the lap sections of the harness then pull the adjuster strap until the harness is fully tightened.

The harness should be adjusted as tightly as possible without causing discomfort to your child.

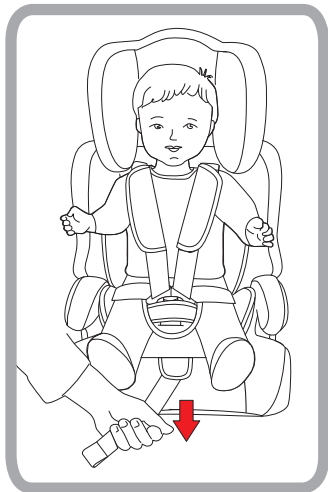

EST-215 Car Seat

TIGHTENING THE HARNESS

Ensure that the lap strap portion of the harness is located as low as possible towards the thighs and not around the stomach.

A loose harness can be dangerous. Check the harness adjustment and tighten each time the child is placed in the seat.




EST-215 Car Seat

LOOSENING THE HARNESS

The harness is loosened by pressing the lever (under the seat cover) on the front of the seat.

Press down on the label marked press as you grip the two shoulder straps with your other hand. Pull the shoulder straps towards you to loosen the harness.


Take care when you adjust the shoulder straps that you do not trap the harness adjuster straps as you press the lever down.

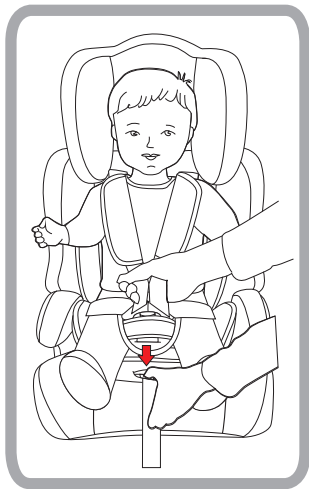


EST-215 Car Seat

FASTENING THE SAFETY SEAT BUCKLE

Step 1. Slot the two metal sections of the buckle connectors together.

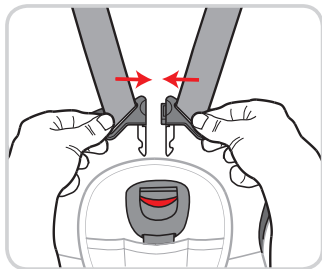


Step 2. Slot the two buckle connectors into the slot in the top of the buckle until they click into place.

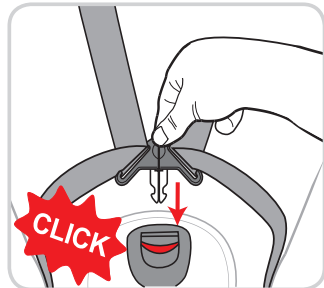

EST-215 Car Seat

FASTENING THE SAFETY SEAT BUCKLE

Step 3. Always check the harness is correctly locked by pulling the shoulder straps upwards.

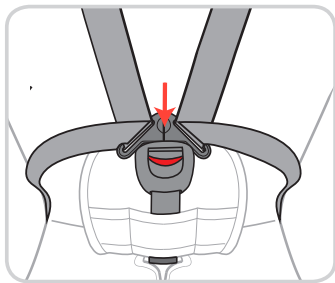

To release the harness. Press the red button on the buckle downwards.




GROUP 2

EST-215 Car Seat

REMOVING ALL STRAPS

REMOVING THE SAFETY HARNESS

SHOULDER STRAPS



EST-215 Car Seat

REMOVING ALL STRAPS

REMOVING THE SAFETY HARNESS

SHOULDER STRAPS




Release the strap at the bottom of the backrest cover to gain access to the harness.

Slide both of the harness straps off the harness connector at the back of the backrest and pull the webbing through the slots in the seat backrest and fabric cover.



EST-215 Car Seat

REMOVING THE SAFETY HARNESS LAP STRAPS




Turn the webbing retainers on their narrowest end and feed them through the slots in the base of the seat and then through the slots in the fabric cover.

EST-215 Car Seat

ADJUST THE HEADREST HEIGHT

According to different height of children, the headrest can be adjusted up and down.

Step 1. Put one hand on the backrest.

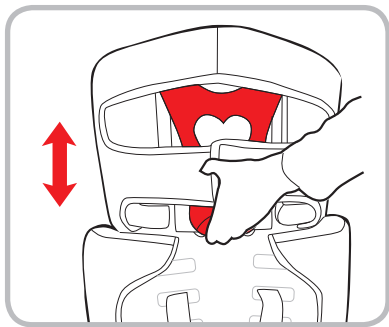

EST-215 Car Seat

ADJUST THE HEADREST HEIGHT

Step 2. Pull the button/lever with your other hand.

Step 3. Position the headrest to a suitable height for your child.



NO-Too low



NO-Too High



YES-Correct

EST-215 Car Seat

GROUP

2

Installing the seat

(15 - 25kgs)




fig.B1

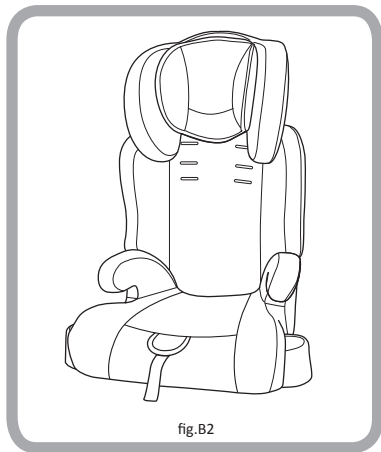


fig.B2



EST-215 Car Seat

GROUP

2

Installing the seat

(15 - 25kgs)

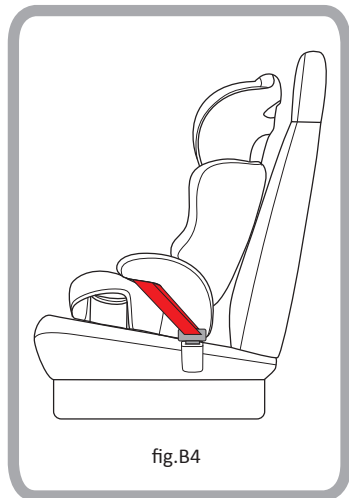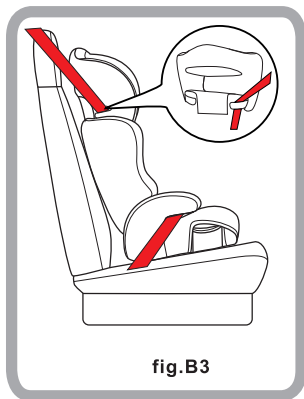

C | S
— COZY N SAFE —

EST-215 Car Seat

GROUP

2

Installing the seat

(15 - 25kgs)

Step 1. Place the child safety seat on the vehicles' seat ensuring it is firmly pressed against the car seat backrest.

Step 2. Place the child in the child safety seat.



fig.B5

EST-215 Car Seat

GROUP

2

Installing the seat

(15 - 25kgs)

Step 3. Fasten the seat belt, making sure that both sections of the seat harness go under the armrest near the buckle, the diagonal belt goes through the red belt guide on the side of the headrest. Check that the harness has not twisted and tighten the seat belt by pulling the diagonal strap upwards.

Make sure the seat belt has not twisted. Also check that the cover is not impeding the movement or fit of the seat harness in any way. To release your child simply unfasten the seat belt in the normal way.

GROUP 3

EST-215 Car Seat

GROUP


3

Installing the seat

(22-36kgs)

Refitting the backrest.

To refit the backrest simply reverse the below process.

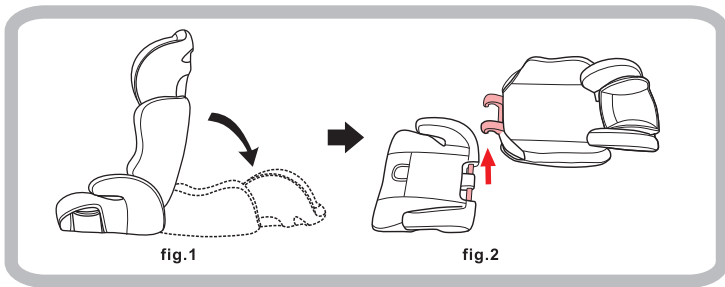

EST-215 Car Seat

GROUP

3

Installing the seat

(22-36kgs)

Step 1. Place the seat forward facing in your car, ensuring it is pushed firmly into the car seat and sit your child on the seat.

Step 2. keep the seat-belt tight across your child, holding on to the seat-belt at the position where it crosses your child's shoulder (fig.3).



fig.3

EST-215 Car Seat

GROUP

3

Installing the seat

(22-36kgs)

Step 3. Now, pull the seat-belt forward away from your child, keeping holding of the seat-belt at the position where it crossed your child's shoulder as this is where the locking clip must be attached to the seat-belt.

Step 4. Pull the adjuster strap to remove any slack from the locking clip. Your child should now be secure.

EST-215 Car Seat

Checklist

To ensure the optimum safety of your child, check the following after installation and before every journey:

- Check the car seat is correctly assembled.
- Do not put the car seat in a seat fitted with an airbag.
- Check the car seat is facing forwards in the vehicle in the direction of the travel (4)
- Check the headrest is at the right height for your child (6, 7, 5a)

EST-215 Car Seat

- Check that the 3 - point vehicle safety-belt is in the correct position for the child.
- Check the buckle tongue is totally inserted into the vehicle seat buckle.

Maintenance Advice

To remove the cover

- Separate the booster seat and the backrest.
- Open the velcro fastener and remove the cover of the booster seat.

EST-215 Car Seat

- Open the velcro fastener on the back side of the backrest and remove the cover.
- Open the velcro fastener and remove the headrest.

Cover Removing and Cleaning

WARNING! TOXIC CLEANING FLUIDS CAN CAUSE ILLNESS, NEVER USE BLEACH. DO NOT IRON, DO NOT MACHINE WASH. DO NOT TUMBLE DRY AS THIS COULD DAMAGE THE COVER AND REQUIRE REPLACING.

EST-215 Car Seat

The car seat cover is removable and washable. In case of light staining, clean using a damp cloth or soapy water. The cover can be removed completely and hand washed up to 30 °C.



Hand wash,
water
temperature
below 30°C



Do not bleach



Dryclean, any
solvent except
trichloroethylene



Do not tumble dry



Do not iron

Additional information

Do not use this car seat on a shopping trolley.

This car seat is not approved for use on aircraft.





Euro Stock Traders Ltd

Cozy N Safe

Oxford Street, Wolverhampton,

West Midlands, WV14 7DP, UK

Tel: +44 (0) 1902 494905

Fax: +44 (0) 1902 490211

Email: enq@cozynsafe.com